

## 4K Ultra HD Serial (60fps)

# 4K Professional Super Telephoto PTZ Camera UAI4VX630AL



4K 60FPS



AI Smart Tracking



Optical Zoom Control



30x Remote Control



Multiple Interface

Designed for ProAV market, equipped with 30X large optical zoom, coupled with robust and reliable Pan/Tilt mechanical, achieve a smooth and precise tracking. Best choice for broadcasting, live streaming, stadiums and other scenarios need large optical zoom.



## Features

### ▼ 4K60FPS

Use a high-quality 1/1.8 inches UHD CMOS sensor with 8.42 million pixels. Support max 4K60fps image output and multiple lower resolutions like 1080p/720p.

### ▼ 30x Optical Zoom + 59° Wide-angle Lens

4K optical lens, support max 30x optical zoom and 59° horizontal field of view, can cover the demand of Extra-large conferencing room and other scenarios need larger optical zoom.

### ▼ AI Smart Tracking

With the built-in AI capability and algorithms, camera can support multiple tracking modes, including body tracking, hybrid tracking and etc.

### ▼ Remote Control

Support multiple ways of control, like RS232, RS485, Network and USB.

### ▼ Non-compressed video stream

HDMI2.0 and 3G-SDI I/O, can output non-compressed video stream.

### ▼ Low Illumination

The new generation high performance CMOS image sensor can significantly reduce the image noise in low illumination. With the 3D noise reduction algorithms, even in an ultra-low illumination environment, camera can still deliver a sharp and clean image with more than 55dB S/N ratio.

### ▼ Gravity Sensor

Support image flipping, apply to head-up/head-down installation.

### ▼ NDI@|HX2|

Support low-latency NDI@|HX2| protocol, plug to play, minimal configuration and easy for deployment.

### ▼ Multiple Interfaces

HDMI2.0, USB2.0/3.0, 3G-SDI (Up to 150 meters transmission with 1080P30), LAN. Support HDMI/3G-SDI, USB, LAN streaming simultaneously<sup>2</sup>.

Remark:

1. This function is optional.
2. For simultaneous output of 4 HD digital signals, please contact the manufacturer for specific version support.

## Product Specification

### ▼ Camera Spec

Signal System	HDMI: 4KP60, 4KP59.94, 4KP50, 4KP30, 4KP25, 4KP29.97, 1080P60, 1080P50, 1080I60, 1080I50, 1080P30, 1080P59.94, 1080I59.94, 1080P29.97, 720P60, 720P59.94; 3G-SDI: 1080P/60, 1080P/50, 1080P/30, 1080P/29.97, 1080P/59.94, 1080P/25; 1080I/60, 1080I/50, 1080I/59.94; 720P/60, 720P/59.94;
Sensor	1/1.8 inches, CMOS, Effective Pixels: 8.42 Megapixels
Scanning Mode	Progressive
Lens	30x, f=7.1mm ~ 210mm, F1.61 ~ F5.19
Digital Zoom	16x
Minimum Illumination	0.5Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual, VAR
Backlight	Support
Compensation	Digital 3D Digital Noise Reduction
Noise Reduction SNR	≥55dB
Horizontal FOV	59.2° ~ 2.5°
Vertical FOV	34.6° ~ 1.4°
Pan Angle	±170°
Tilt Angle	-30° ~ +90°
Pan Speed	1.7° ~ 100°/s
Tilt Speed	1.7° ~ 69.9°/s
Image Flip	Support
Image Freeze	Support
PoE+	Support
Preset Position	255
Preset Accuracy	0.1°

### ▼ I/O

HD Output	1 x HDMI: Version 2.0; 1 x 3G-SDI: BNC, 800mVp-p, 75Ω, as per SMPTE 424M standard
Network	1 x RJ45: 10M/100M/1000M adaptive Ethernet
Interface Audio	1 x LINE IN: 3.5mm Jack 1 x LINE OUT: 3.5mm Jack
Interface	1 x USB2.0, Type-A 1 x USB3.0, Type-B1
USB Interface	1 x RS485: 2pin phoenix port, Max Distance: 1200m, Protocol: VISCA / Pelco-D / Pelco-P; 1 x RS232 IN: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA / Pelco-D / Pelco-P; 1 x RS232 OUT: 8pin Mini DIN, Max Distance: 30m, Protocol: VISCA only
Control Interface	Support
RESTORE Button	JEITA type (DC IN 12V)
Power Interface	

### ▼ Network Spec

Video Compression	H.265 / H.264 / MJPEG
First Stream	First Stream, Second Stream
First Stream Resolution	3840x2160, 1920x1080, 1280x720, 1024x576
etc. Second Stream Resolution	720x480, 320x240 etc.
Video Bit Rate	First Stream: 32kbps~51200kbps Second Stream: 32kbps~20480kbps
Bit Rate Control	VBR, CBR
Frame Rate	50Hz: 1fps~50fps, 60Hz: 1fps~60fps
Audio Compression	AAC, G711A
Audio Bit Rate	96Kbps, 128Kbps
Protocols	NDI@ HX2 , SRT, TCP/IP, HTTP, RTSP, RTMP(s), Onvif, DHCP, GB/T 28181, Multicast, etc.


### ▼ USB Spec

Operating System Supported	Windows 7 (only supports UVC1.1 features), Windows 8 and above version, Mac OS X, Linux 2.4.6 and above version, Android needs to include the version of UVC-related drivers
Color System / Compression	YUY2 / H.264 / MJPEG / H.265
Video Format	YUY2: Max.1080P5 (USB2.0) ; YUY2: Max.1080P30 (USB3.0) 1; H.264 AVC: Max.2160P30; H.265 HEVC: Max.2160P30; MJPEG: Max.2160P30
USB Audio	Support
USB Video Communication Protocol	UVC 1.1~1.5
UVC PTZ Control	Support

### ▼ Generic Spec

Input Voltage	DC 12V / PoE+ (802.3at)
Input Current	2A (Max.)
Operating Temperature	0°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Power Consumption	18W (Max.)
Dimension	170mm (W) x 196mm (D) x 228mm (H)
Net Weight	2.0kg

## Interface Diagram

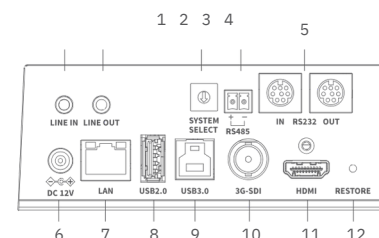

- |                   |             |
|-------------------|-------------|
| 1 — LINE IN       | 7 — LAN     |
| 2 — LINE OUT      | 8 — USB2.0  |
| 3 — SYSTEM SELECT | 9 — USB3.01 |
| 4 — RS485         | 1 — 3G-SDI  |
| 5 — RS232 IN/OUT  | 0 — HDMI    |
| 6 — DC 12V        | 1 — RESTORE |